

PCI®

Für Bau-Profis

The star runner among
the flowable screeds



New

PCI Novoment® Flow

Ready-mixed, flowable screed mortar for self-leveling cement screeds

- Self-leveling and suitable for buffing – ideal for easy processing in a standing position
- Fast drying – can already be walked on after about 6 hours and tiled over after about 1 day
- For a wide variety of applications – with layer thicknesses from 20 to 80 mm


PCI Novoment® Flow

Go with the flow: Thanks to very good self-leveling flow properties

Especially convenient and highly efficient: thanks to its very good self-leveling flow properties the new flowable screed PCI Novoment® Flow allows screed layers to work in a standing position and to apply the screed manually or using machinery, instead of working on their knees. This product not only makes for a new level of convenience but also ensures greater efficiency during laying. As part of the PCI Novoment® family, the flowable screed also features fast drying, is ready to be tiled over quickly and is suitable for a wide variety of projects and applications.

Premium advantages

- Self-leveling and suitable for buffing – ideal for easy processing in a standing position
- Fast drying – can already be walked on after about 6 hours and tiled over after about 1 day
- Long working time – can be processed and smoothed for a long time despite short curing time
- For a wide variety of applications – with layer thicknesses from 20 to 80 mm
- Resists temperatures from -30 °C to +80 °C
- For indoor and outdoor use
- Insensitive to moisture – also suitable for permanently wet areas
- Very low emission products in accordance with GEV EMICODE EC1 PLUS
- Classified in accordance with DIN EN 13813 as CT-C60-F7

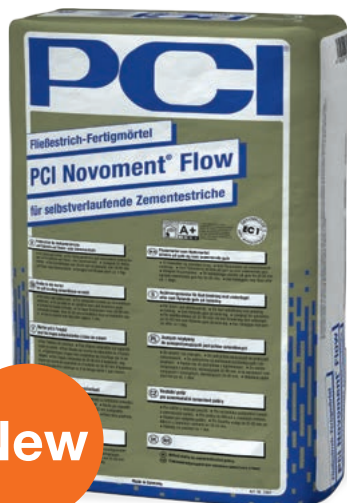

New



PCI Novoment® Flow can be applied by hand or machine.



Working in a standing position is extremely convenient.



Very convenient and highly efficient in processing, PCI Novoment® Flow also offers an impressive result.